

Steve Sisolak, Governor James R. Lawrence, Acting Director Rebecca L. Palmer, Administrator, SHPO

Stewart Facility 5500 Snyder Avenue, Carson City, NV 89701

Request for Permission to Undertake Structural or Visual Alterations

In accord with the requirements set forth in existing covenants,

<u>State of Nevada Public Works Division (name of agency)</u> is requesting written permission to undertake visual or structural alterations as described below:

Building Number and Name: Building 19, Bakery and Post Office

Building's Date of Construction: 1925

_			
Sunn	lementary	, Intorm	ation:
JUDD	ciliciliai v	, 111101111	ıatıvı.

Please indicate if you have submitted the following-

- X Written description of proposed work (*required*; see second page)
- **X** Photographs of existing conditions (*required*)
- X Sketches, plans, or architectural drawings depicting the proposed work
- X Sketch or site plan of project location

	C	- C				1	1
	Specs	Δt	m ata	rialc	ŧΛ	nΔ	חכםח
	JUELS	OI I	mate	ııaıs	LU	υC	uscu

X Historic photographs depicting past condition or design

Other

Marc N. Burgess

Request Submitted by:

Marc N. Burgess

Marc N. Burgess (Nov 20, 2023 09:14 PST)

s (Nov 20, 2023 09:14 PST)

Nov 20, 2023

Print name

Signature

Agency - SPWD
Title - Project Manager
Email address - marcburgess@admin.nv.gov
Phone number - (775) 684-4127

Date of Request: 11/20/2023

Please allow up to 14 business days for this form to be processed. Proposed work must not begin until this form has been reviewed and approved by both the State Historic Preservation Office and the Nevada Indian Commission. In some cases, coordination with State Lands is also necessary. Per NRS 321.003, a state agency must also submit a Certification Request to the Nevada Division of State Lands before constructing a building or making other permanent improvements to state lands. This includes ground disturbance for site work and utilities. If your project requires a State

Lands Certification, you will find the instructions on the Division of State Lands website under "Forms."

http://www.lands.nv.gov/

To expedite your project, the SHPO recommends coordinating with SHPO and State Lands concurrently.

Please submit request form and supplementary materials to the State Historic Preservation Office, 901 S. Stewart St., Ste. 5004, Carson City, NV 89701-5248 or by email to rlpalmer@shpo.nv.gov.

REQUEST APPROVED BY:						
	Date					
Print and sign name	 Date					
riiit ana sign name	Dute					
* Nevada Division of State Lands						
-						
	Print and sign name ands -					

Description of Proposed Work:

Please provide a thorough written description of the proposed work, including—


- Location on building
- Approximate size of area affected
- Existing conditions
- Materials to be used
- Proposed methods (must follow the <u>Secretary of the Interior's Standards</u>)

(Use as many pages as needed)

This is a supplemental request no. 2 prior application 19-C16 "Renovation of Collection Storage Building 19 (Stewart Facility)". State Public Works Division (SPWD) is requesting Nevada State Historic Preservation Office (SHPO) to approve four (4) mortar samples to be taken of the existing masonry historic mortar of Building 19 at the Stewart Facility. Mortar testing will allow the


design team to confirm the composition of the historic mortar and develop specifications for new mortar and pointing. The four (4) mortar samples shall be spread throughout the east elevation of the building.

Location of Building:

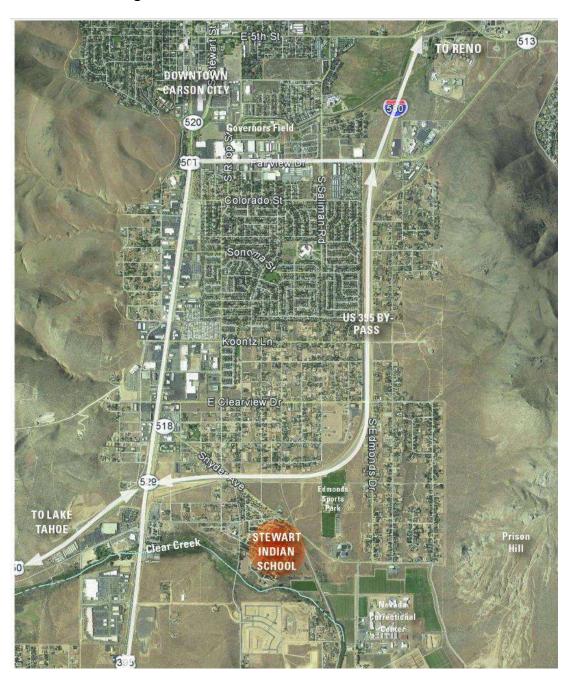


Approximate size of area affected:

Four (4) mortar samples. Proposed mortar sample locations are shown below, exact location of work to be preformed shall be coordinated with SHPO to limit impact to the building.

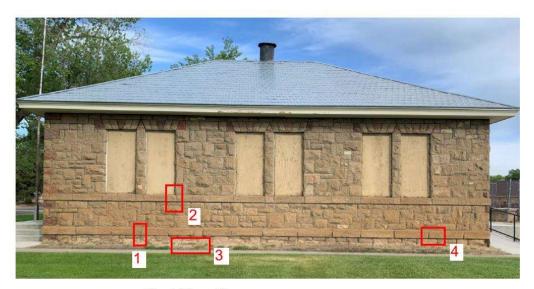

East Elevation

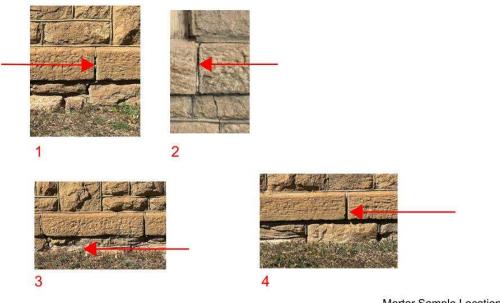

Mortar Sample Locations 10/16/23

Existing Conditions (pictures):





North Elevation

South Elevation





East Elevation

West Elevation



Existing Historic Mortar

Materials to be used:

N/A

Proposed Method:

Four (4) mortar samples measuring 2" x2"x 6-1/2" or 2"x 2" x 2" to be taken of existing historic mortar. Samples shall be tested for composition.

- Moisture
- Dry density
- Voids
- Salt content
- Subjective Hardness Evaluation (if strength test could not be performed)
- Estimation of lime/ Portland cement content
- Lime to sand or cement to cand estimated ratio by dry volume
- Aggregate gradation
- Aggregate color

Samples that are 50 grams or more, provide more accurate results. When samples are 20-grams or less, the results provided are considered estimates.

Project 19-C16 shall include in scope of work repairing sampled locations.