


Table of Contents

• Floor Plan—Flooring and Asbestos Debris Abatement Plan	4
• Ceiling Plan—Lead Paint Abatement	5
• Pipe Removal Plan—Piping TSI Removal	6
• Work Completed as part of Initial Clean-up effort October 12, 2017	7
• Proposed Work	9

Stewart Indian School Complex
 Request for Permission to Undertake Structural or Visual Alterations

		NEVADA STATE PUBLIC WORKS DIVISION CARSON CITY, NEVADA	Checked: NIS Drawn: MAM Scale: AS NOTED Date: 8/15/17
		ENVIRONMENTAL HAZARD CLEAN UP - OLD GYM STEWART Project Number 17-C09 SHEET 09B - FLOORING & ASBESTOS DEBRIS ABATEMENT PLAN	

SHEET NOTES

- SQUARE FOOTAGES SHOWN ARE APPROXIMATE, AND SHOULD BE FIELD VERIFIED.
- METAL RADIATORS CAN BE MOVED FOR THE FLOORING ABATEMENT OPERATIONS, BUT MUST BE PLACED BACK IN THEIR ORIGINAL LOCATIONS. PIPING DOES NOT REQUIRE RECONNECTION.


KEY NOTES

1. AREAS CONTAINING EXCESSIVE DEBRIS PILES OF 30TH ASBESTOS VCT & NON-ASBESTOS CONTAINING MATERIAL TO BE ABATED.

2. AREAS CONTAINING EXCESSIVE DEBRIS PILES OF 30TH ASBESTOS VCT & NON-ASBESTOS CONTAINING MATERIAL TO BE ABATED. SHELVING UNITS IN THIS AREA SHALL BE WIPED DOWN & DISPOSED OF.

FLOORING ABATEMENT LEGEND

	12x12 TILE OR WOOD TO BE ABATED
	9x9 VCT TO BE ABATED
	WOOD TO BE REMOVED
	12x12 VCT TO BE ABATED

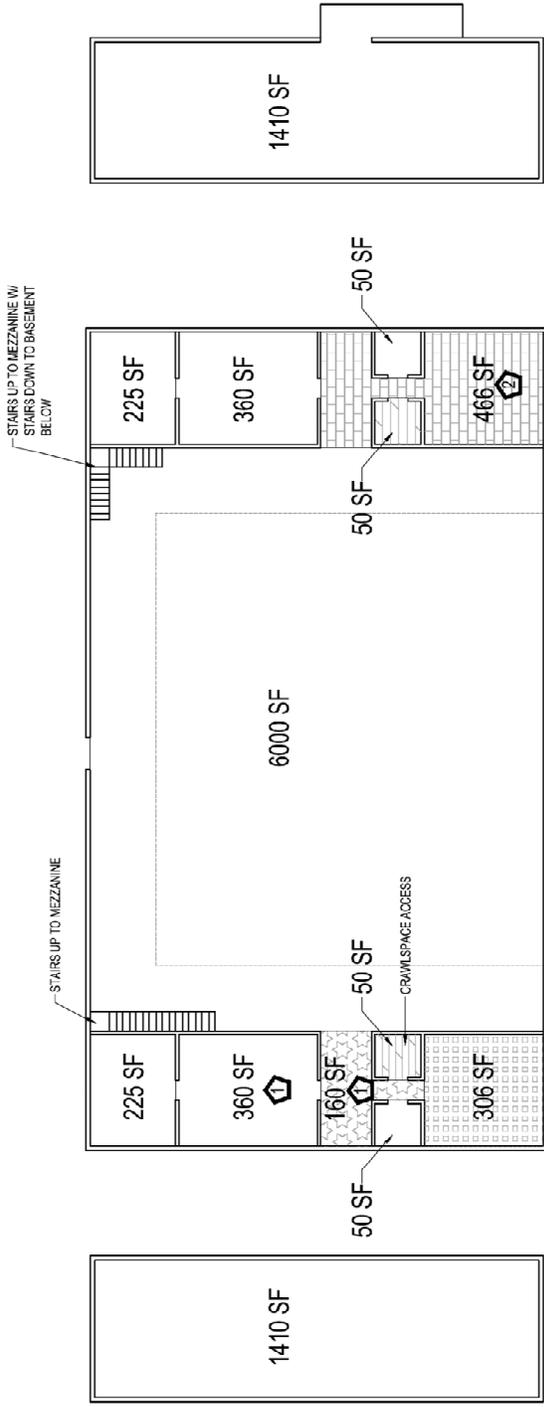

BASEMENT
SCALE: 1/16"=1'-0"

GROUND FLOOR
SCALE: 1/16"=1'-0"

CRAWL SPACE
SCALE: 1/16"=1'-0"


Stewart Indian School Complex
Request for Permission to Undertake Structural or Visual Alterations

2	NEVADA STATE PUBLIC WORKS DIVISION CARSON CITY, NEVADA	Nevada State Public Works Division ENVIRONMENTAL HAZARD CLEAN UP- OLD GYM STEWART Project Number 17-C09 Sheet Title: LEAD PAINT ABATEMENT	Checked: NIS Drawn: MAH Scale: AS NOTED Date: 8/15/17	
---	--	--	--	--

SHEET NOTES
1. SQUARE FOOTAGES SHOWN ARE APPROXIMATE, AND SHOULD BE FIELD VERIFIED.

KEY NOTES
① PEELING LEAD PAINT TO BE ABATED ON THIS WALL FROM CORNER TO CORNER, AND FROM FLOOR TO UNDERSIDE OF MEZZANINE.
② PEELING LEAD PAINT TO BE ABATED ON THIS WALL FROM CORNER TO CORNER, AND FROM FLOOR TO TRUSSES @ ROOF STRUCTURE.

CEILING ABATEMENT LEGEND
 PLASTER CEILINGS TO BE REMOVED IN THEIR ENTIRETY. PLASTER CONTAINS NO HAZARDOUS MATERIALS, BUT HAS A LEAD PAINT FINISH.

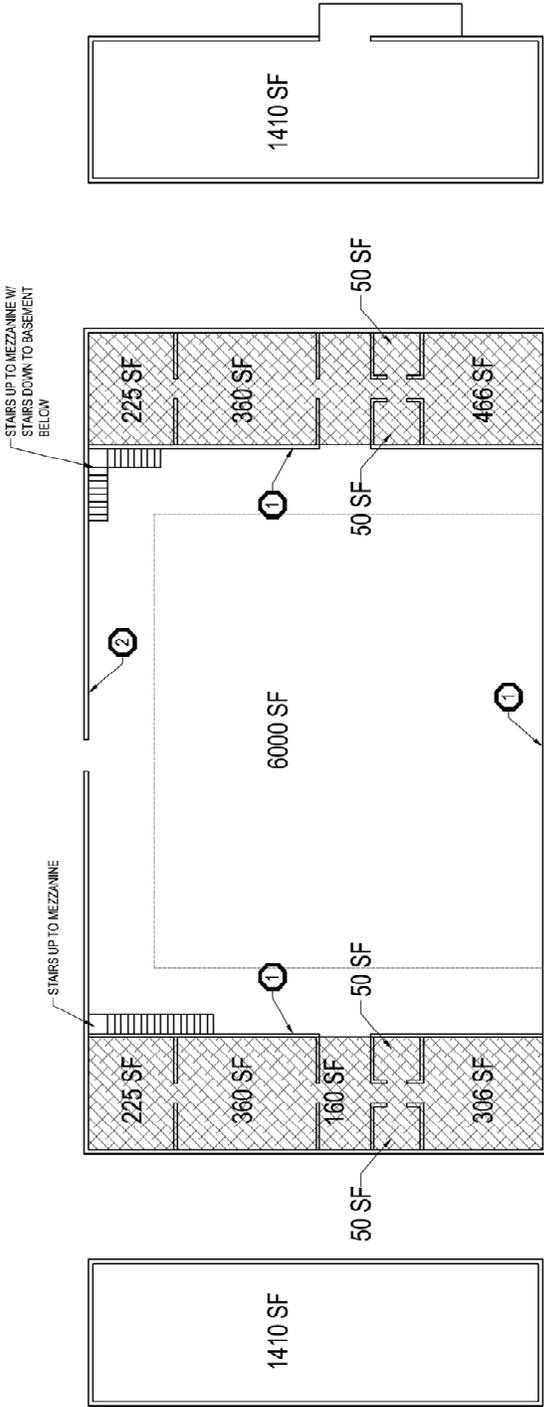


BASEMENT
SCALE: 1/8"=1'-0"

GROUND FLOOR
SCALE: 1/8"=1'-0"


CRAWL SPACE
SCALE: 1/8"=1'-0"

Stewart Indian School Complex
 Request for Permission to Undertake Structural or Visual Alterations

	ENVIRONMENTAL HAZARD CLEAN UP - OLD GYM STEWART Nevada State Public Works Division	NEVADA STATE PUBLIC WORKS DIVISION CARSON CITY, NEVADA	Sheet No: PIPING TSI REMOVAL
	Project Number 17-C09		Checked: NIS Drawn: MJM Scale: AS NOTED Date: 03/27/17

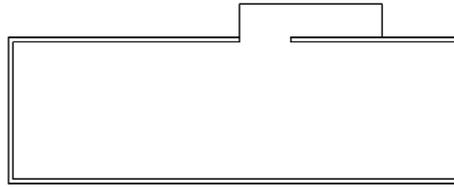

BASEMENT
 SCALE: 1/8"=1'-0"

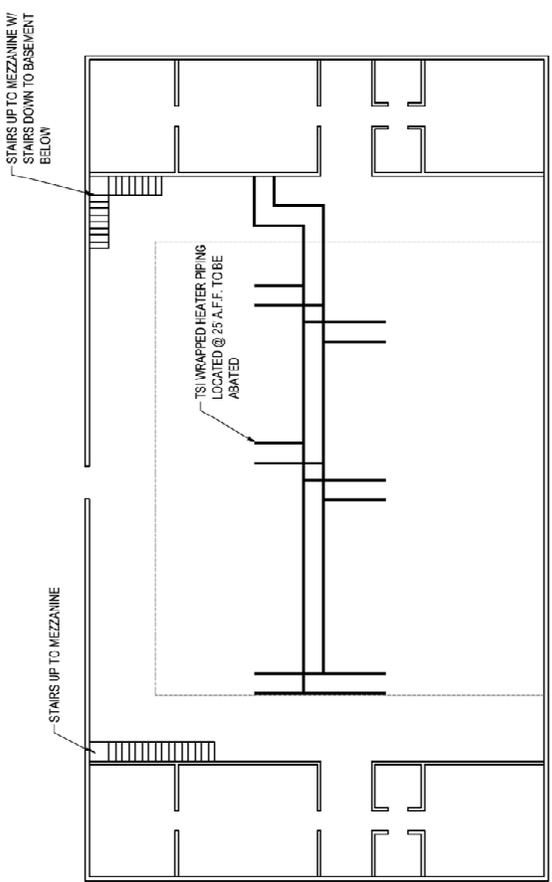

GROUND FLOOR
 SCALE: 1/8"=1'-0"



CRAWL SPACE
 SCALE: 1/8"=1'-0"

SHEET NOTES

1. PIPING IS NOT REQUIRED TO REMAIN, AND MAY BE CUT & REMOVED TO ABATE TSI.
2. HEATERS & CEILING TO REMAIN IN PLACE. UNITS NOT SHOWN ON DRAWING.


*Stewart Indian School Complex
Request for Permission to Undertake Structural or Visual Alterations*

Work Completed as a part of Initial Clean-up effort on October 12, 2017

- Remove the mold impacted wood flooring in the building.
- Remove the water stained and damaged ceiling tiles
- Removed stored HVAC ducting from other projects not related to the Stewart Indian Colony Campus.

Reference Specifications for Gym Floor Debris Removal included as a separate document.

Photographs Before Clean-up of October 12, 2017

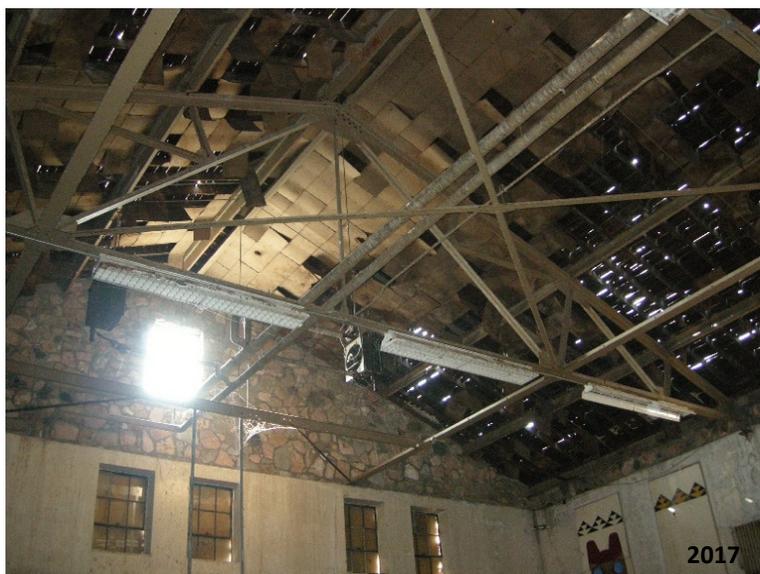

Photographs After Clean-up of October 12, 2017



Proposed Work Overview

Overall, we are not proposing to damage or remove original or historic items in the building. The only item that is original is the ceilings in the single story sections. Refer to page 11.

The Categories of work being proposed are:

- p. 9-14
Removal of damaged and hazardous material items
Removal of stored items that do not relate to the building
Storage of items that will remain in the building
- P. 15-19
Investigation of existing structural conditions

Reference Specifications for Asbestos & Lead Paint Abatement included as a separate document.

Proposed Work


Abate the peeling lead paint. This will only consist of scraping the peeling paint, we will not be abating the entire painted surfaces.



Proposed Work

Abate the piping that has asbestos TSI in the gym area/ceiling. The piping is rusted and we will remove the TSI and metal Pipe. We will leave the Heater unit itself. These are old but not original.


For Location reference Environmental Hazard Clean-up Drawings on p. 6.

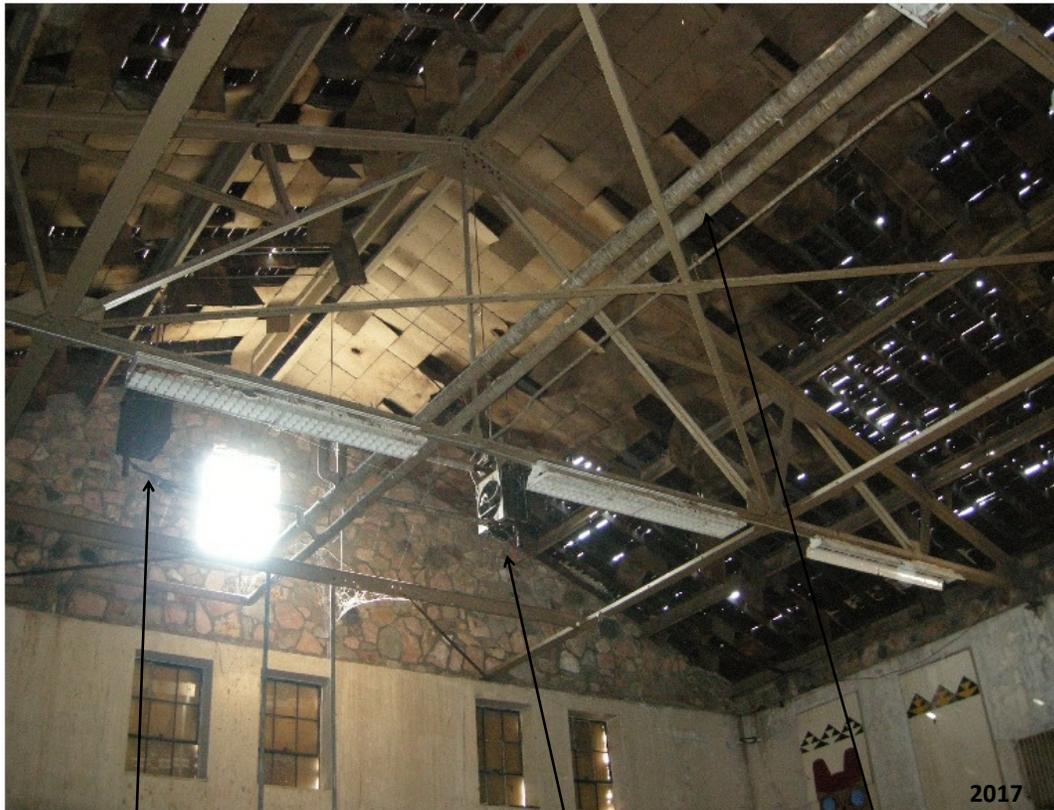

Heater Unit

Heater Unit

Piping

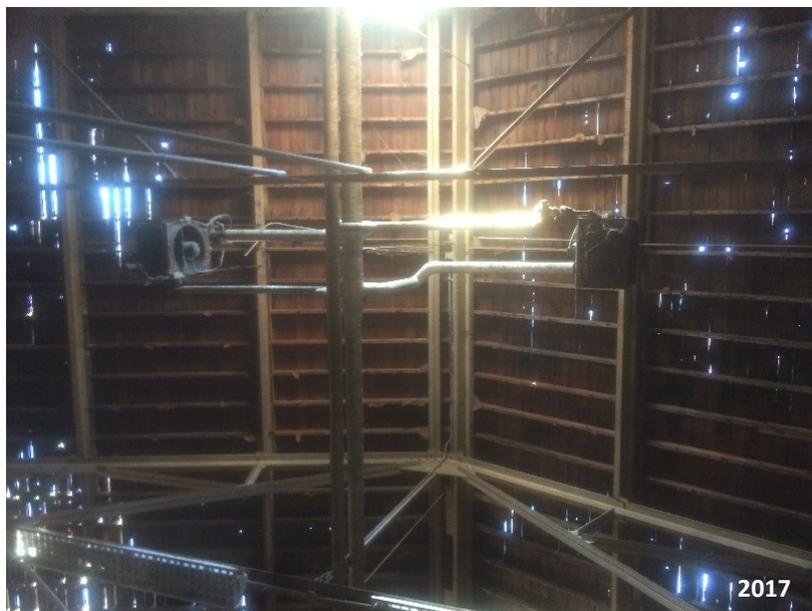

Proposed Work

We will remove the plaster ceilings in the east and west end of the single story sections. This has to be conducted to structurally re-support roof of the structure due to water damage of the roof joists.

For Location reference Environmental Hazard Clean-up Drawings on p. 5.



Proposed Work



Cabinet that will remain in building and miscellaneous ceiling tiles on the floor that will be properly disposed.



Cabinets in the main hallway entrance on the west side. VCT Floor tile on the floor and radiator. Cabinets will be stored in gym area and radiator will remain in building.

Proposed Work



Cabinet that will remain in building.



Cabinet that will be stored in the gym and remain

Proposed Work






Cabinet that will be disposed




Ceiling radiators/heater. Heaters will remain in place and piping (asbestos) will be removed.

Proposed Investigation of Existing Structural Conditions

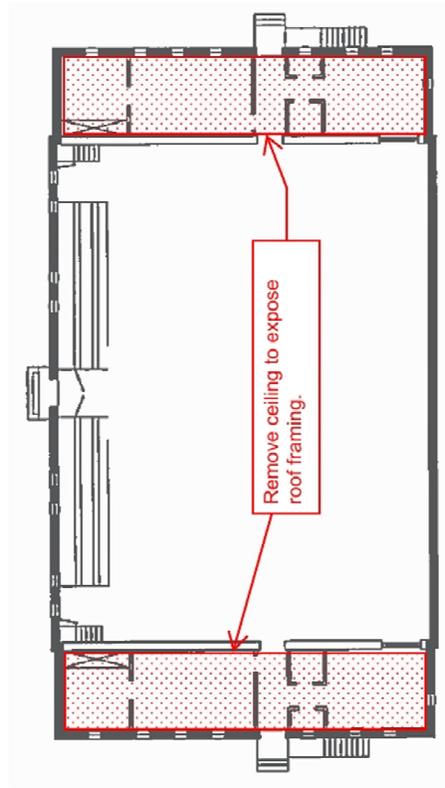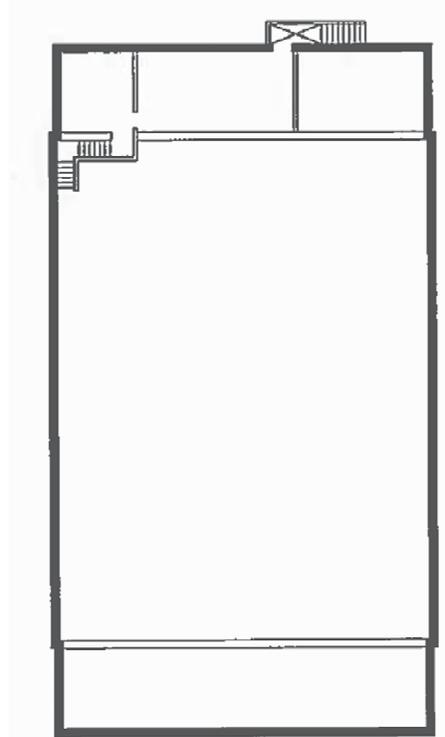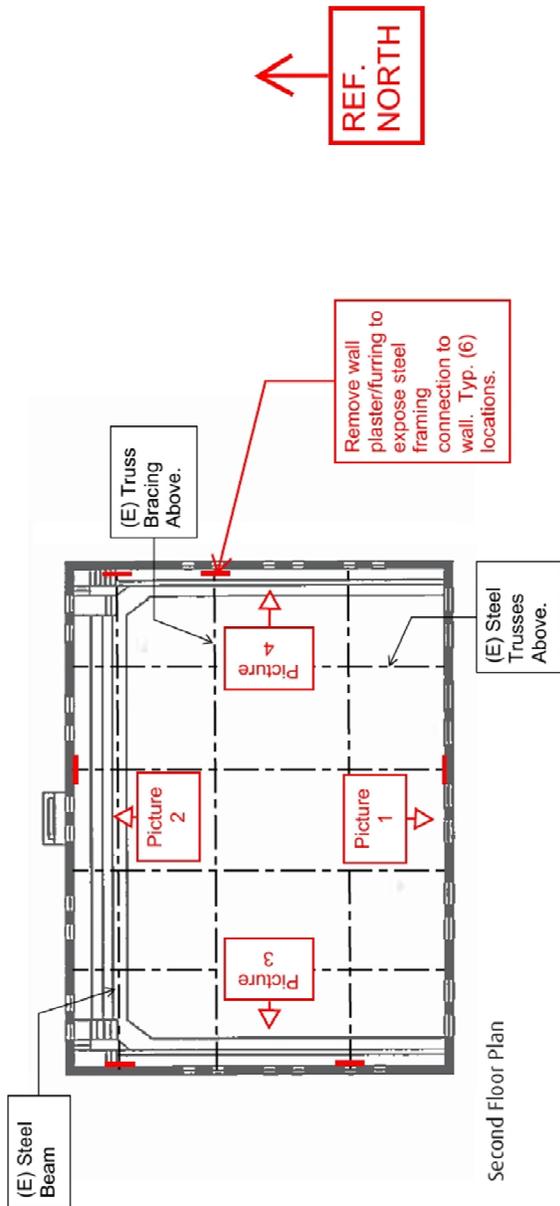

Exploratory Demolition Plans

Proposed Investigation of Existing Structural Conditions

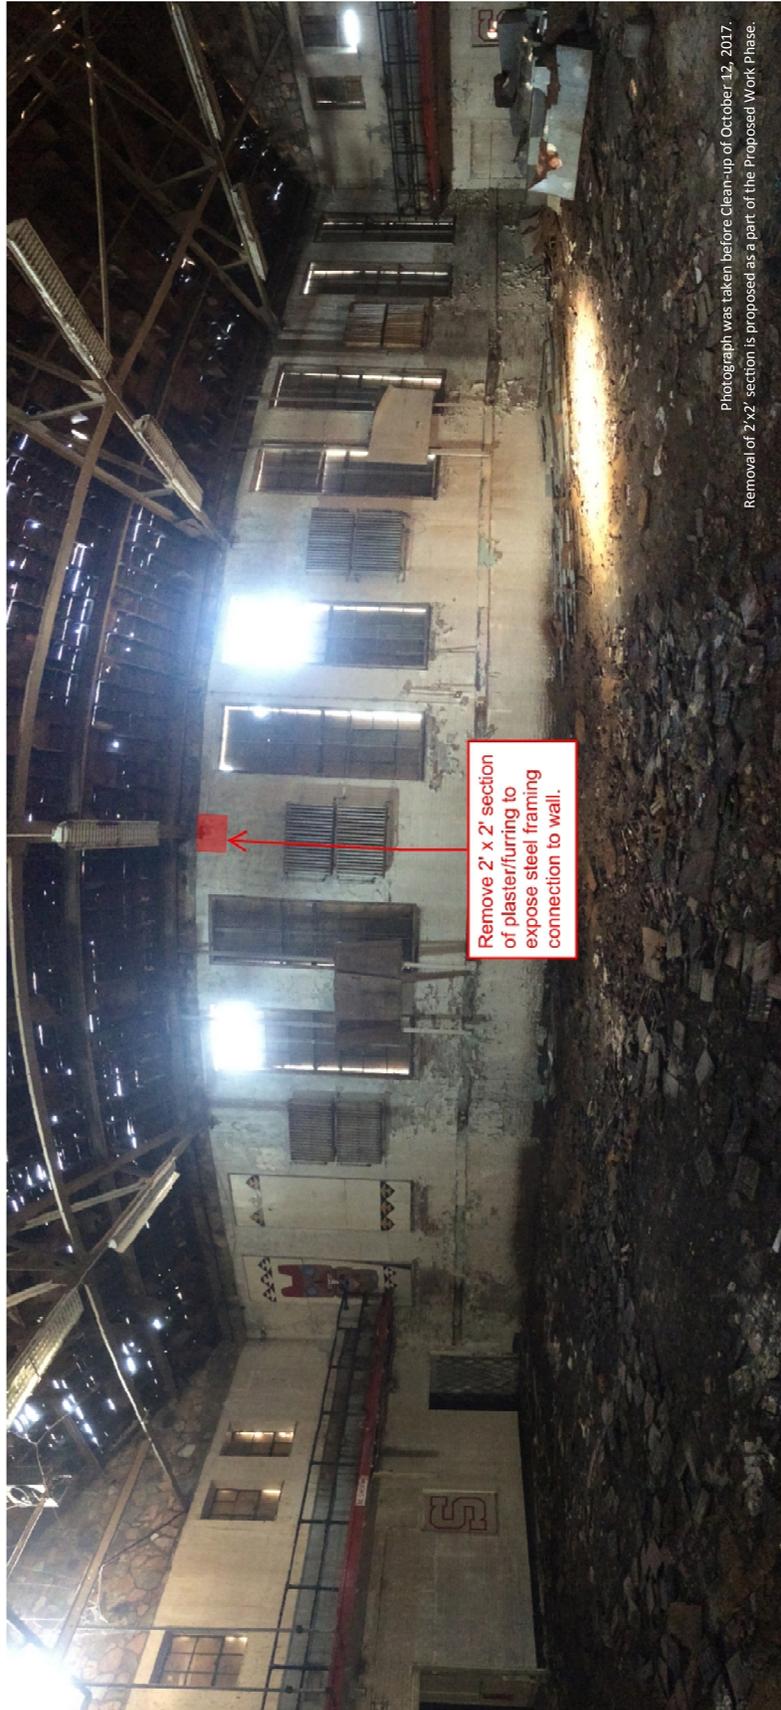


Remove 2' x 2' section of plaster/furring to expose steel framing connection to wall.

Photograph was taken before Clean-up of October 12, 2017. Removal of 2'x2' section is proposed as a part of the Proposed Work Phase.

Picture 1 - South Wall

Proposed Investigation of Existing Structural Conditions

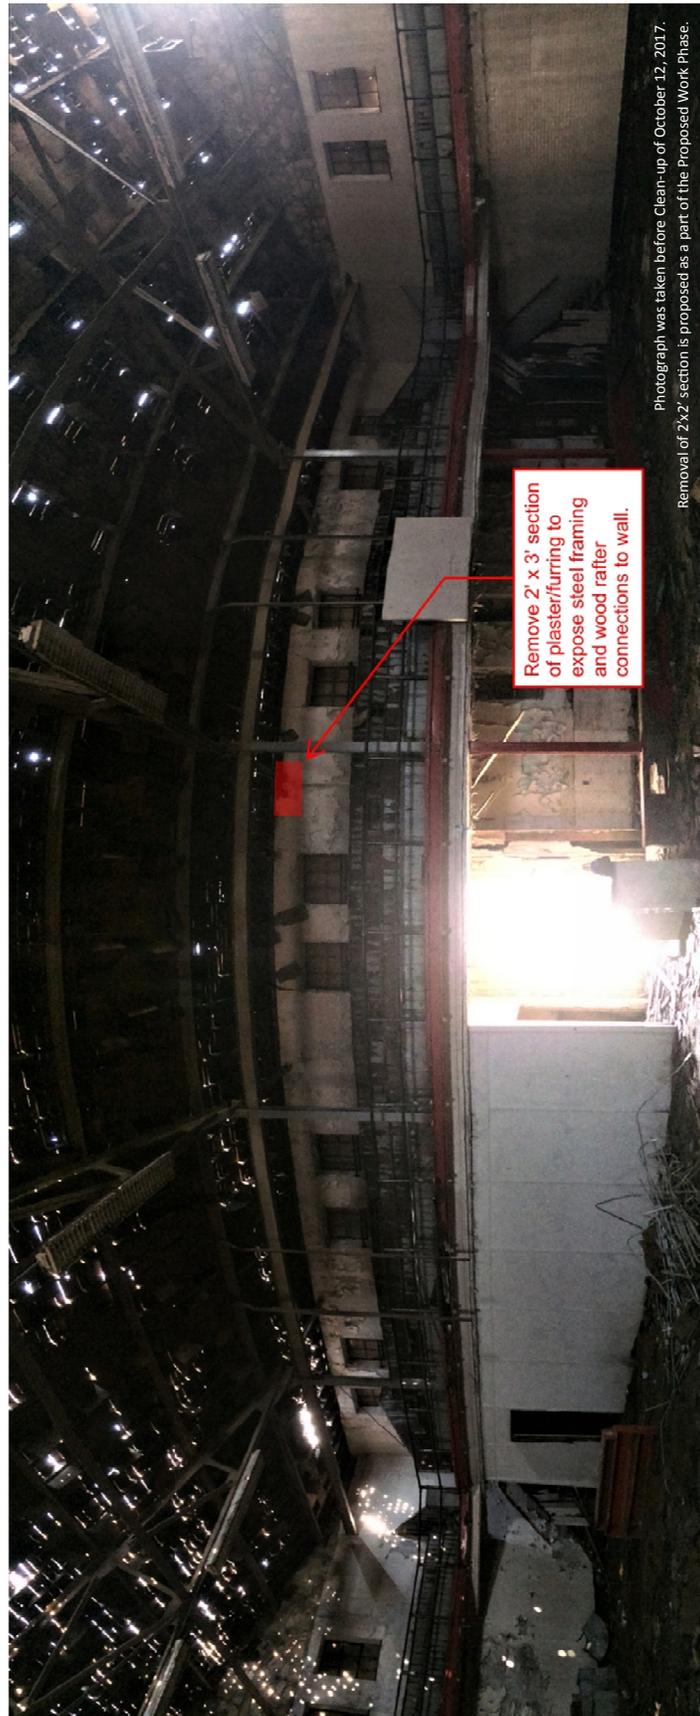

Remove 2' x 3' section of plaster/furring to expose steel framing and wood rafter connections to wall.

Picture 2 - North Wall

Photograph was taken before clean-up of October 12, 2017. Removal of 2x2' section is proposed as a part of the Proposed Work Phase.


Proposed Investigation of Existing Structural Conditions



Photograph was taken before clean-up of October 12, 2017. Removal of 2'x2' section is proposed as a part of the Proposed Work Phase.

Picture 3 - West Wall

Proposed Investigation of Existing Structural Conditions

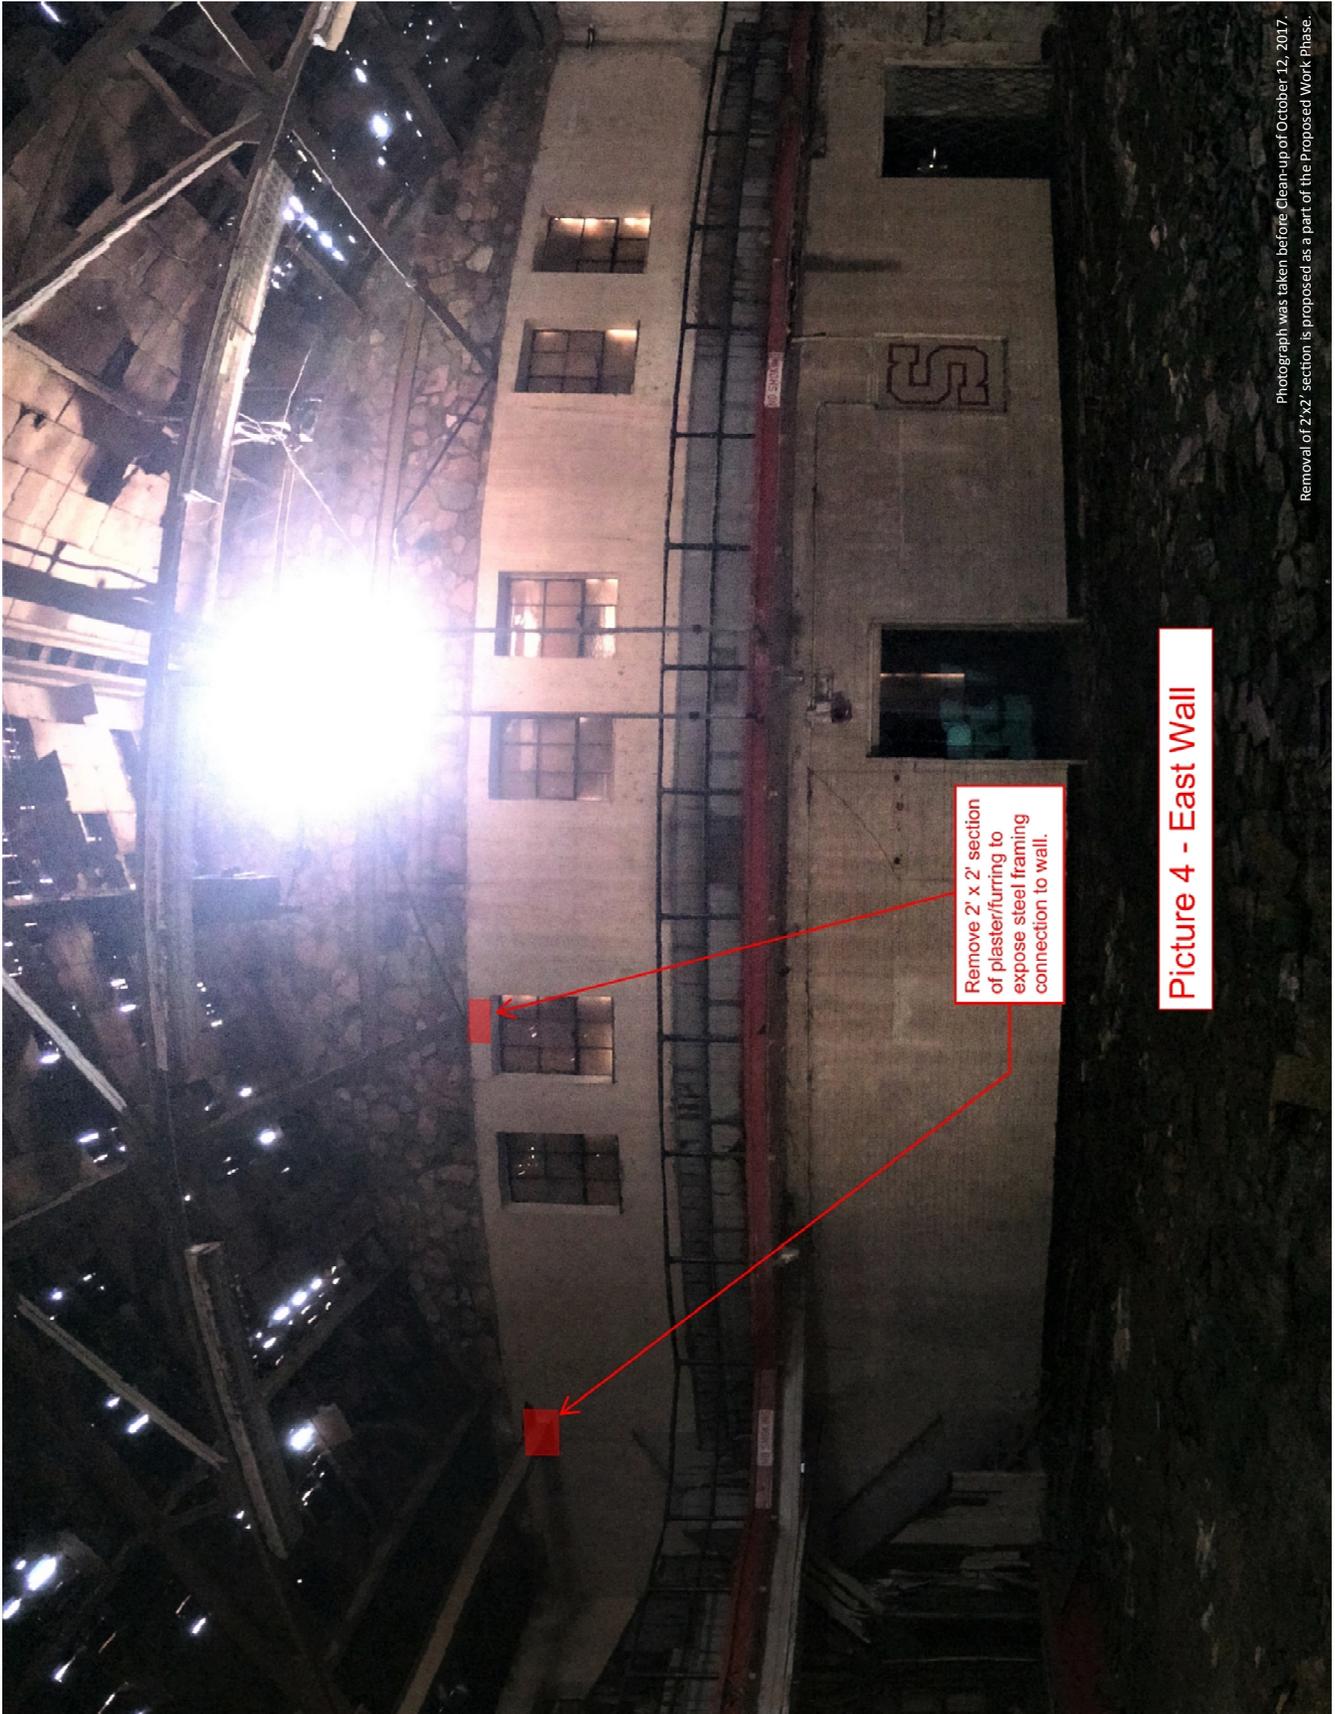

Remove 2' x 2' section of plaster/furring to expose steel framing connection to wall.

Picture 4 - East Wall

Photograph was taken before Clean-up of October 12, 2017. Removal of 2'x2' section is proposed as a part of the Proposed Work Phase.